

GDS-2000 Firmware Upgrade

- Check the present firmware version. Press **Utility** => **F5**(More) ==> **F2**(System Info) . Remember the version number.
- Save the firmware file (File name should be like “*.upg”) to flash disk from PC.
- Insert the flash disk to DSO host Port.
- Press **Save/Recall** key ==>**F3** (Save Setup) ==> **F3** (to select the USB as destination) ==> **F5** (File Utility) ==> **F1**(Select)
- Rotate the **Variable** knob, select the saved “*.upg” file


DO NOT lose the power during update procedure




- When upgrade file selected, press **F1**(Select), a warning message will be appeared ==>"Warring Press F1 again will be upgrading."



- Press **F1** key again, the upgrading window is shown.

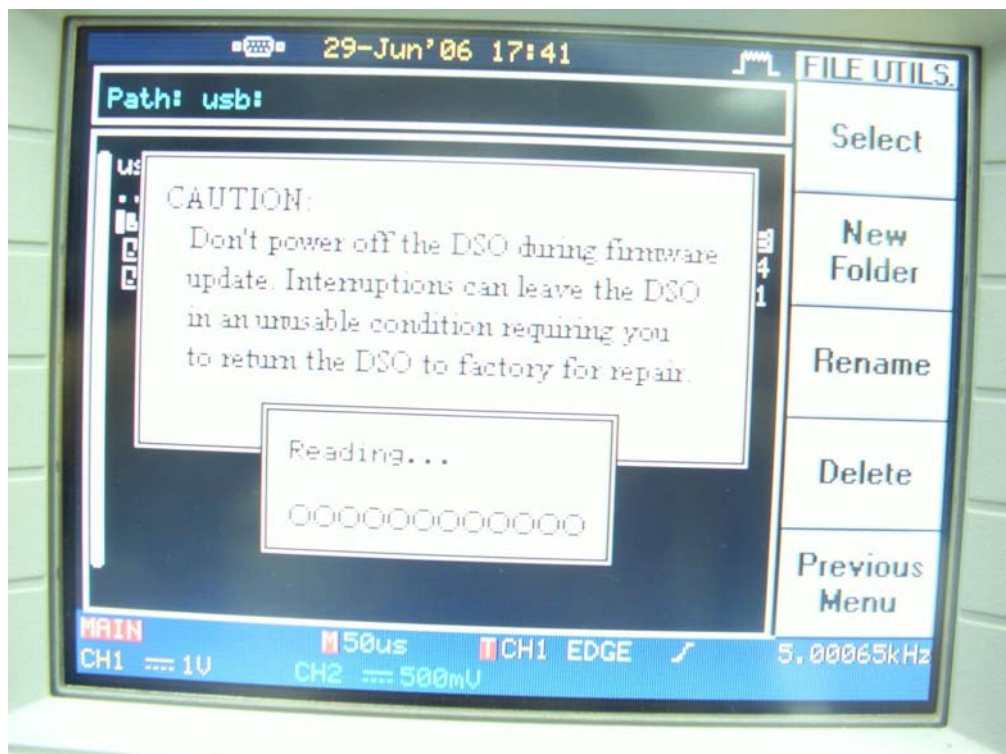


- The “Reading window” will be appeared, which is reading the new firmware data to flash ROM

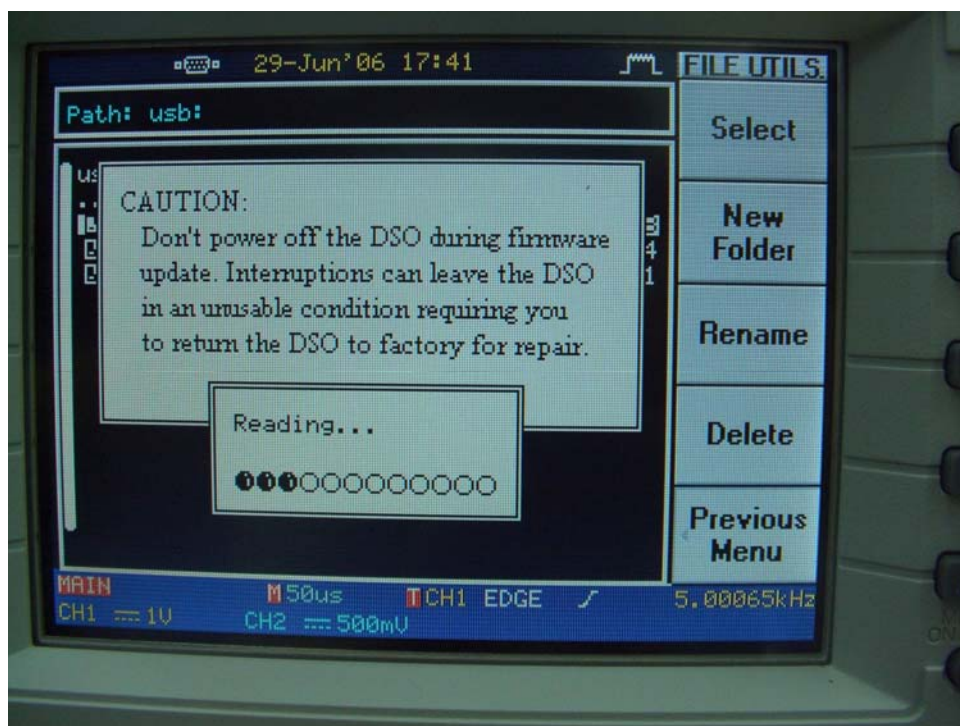


- The "Upgrading window" will be shown afterward which erasing and writing the new data to flash ROM




- When upgrading finished, the message of "Data checking", "System reset 5.4.3.2.1" and "Reboot system" are shown one by one.

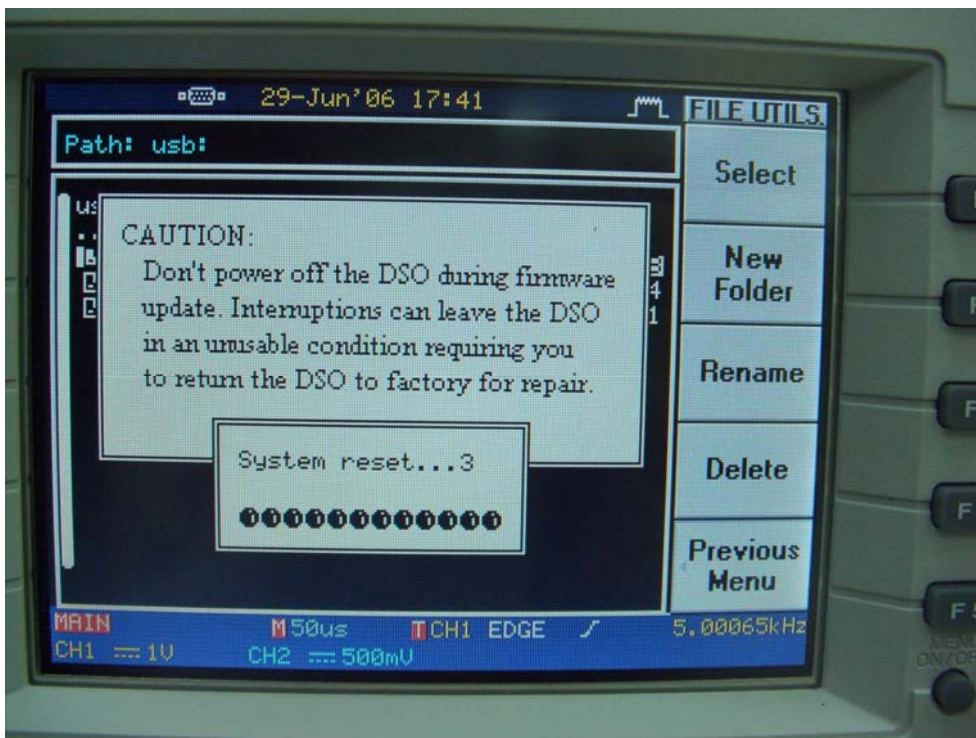

- The system will reboot automatically or you can press ON/STBY button to reboot manually.

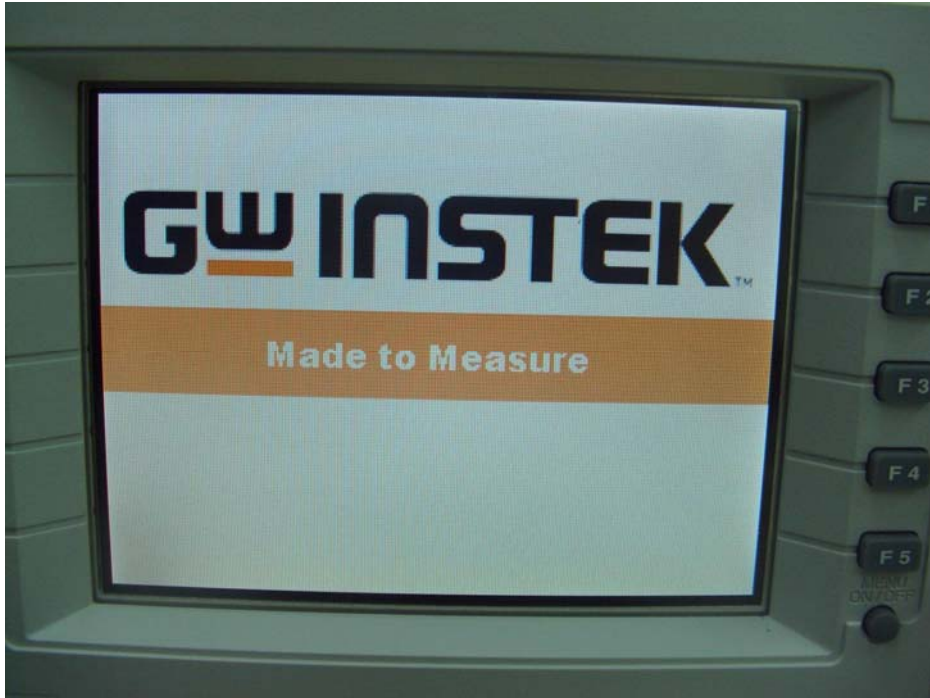

- Check the upgraded firmware version. Press **Utility** => **F5(More)** ==> **F2(System Info)**.

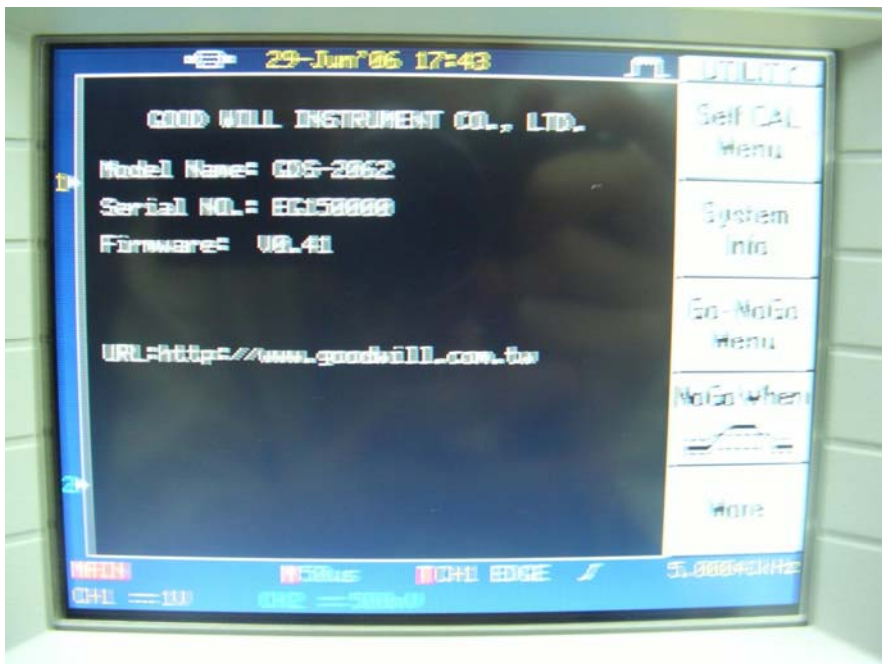

- If the firmware upgrading is fail, please repeat all the steps again!